


| | |
|--------------------------------------|---------------------------------|
| PRODUCT SMOOTH CORR | |
| MATERIAL R SERIES | SIZE 12" - 24" |



MATERIALS:

All Fratco 12" - 24" R Series, formally known as HD, products are produced using minimum 70% recycled High Density Polyethylene resin.

CROSS SECTION DIAGRAM:

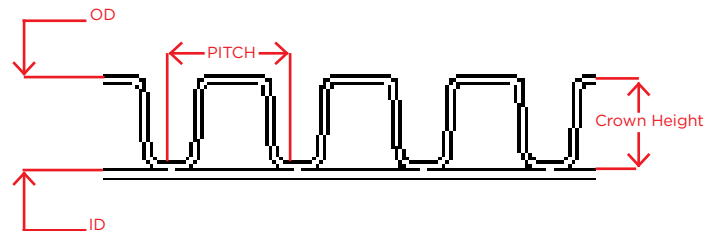

PHYSICAL PIPE DIMENSIONS:

| Nominal Diameter | ID | OD | Crown Height | Pitch | Pipe Weight (Per Foot: Grams/Pounds) | Perforation Type | Available Lengths (In Feet) |
|------------------|--------|--------|--------------|-------|--|------------------|--------------------------------|
| 12" | 11.98" | 14.62" | 1.15" | .50" | 1450 g / 3.19 lbs | Class 2 | 9.75', 20' |
| 15" | 14.96" | 17.66" | 1.14" | .78" | 2150 g / 4.74 lbs | Class 2 | 9.75, 20' |
| 18" | 17.94" | 21.43" | 1.46" | 1.12" | 2945 g / 6.49 lbs | Class 2 | 9.75', 20' |
| 24" | 23.86" | 28.01" | 1.81" | 1.23" | 4850 g / 10.69 lbs | Class 2 | 9.6', 20' |

This specification is held in standard according to the following: ASTM F667.
 Gaskets when applicable, shall meet the requirements of: ASTM F477, ASTM D3212.